

## **Specifications**

Eave height:

3.00m

Span width:

18.00m

Ridge height:

8.12m

**Bay distance:** 

5.00m

Roof pitch:

45° / 15°

Number of gable uprights:

3 Gable upright (per end)

Longest component:

7.72m

Minimum length:

15.00m

Maximum length:

Unlimited in 5.00m increments

**Snow loading:** 

45 kg/m<sup>2</sup> / 9psf

Max allowed wind speed:

102 km/h (0.50kN/m<sup>2</sup>)

Main profile size:

252/122/4mm

**Eave connection type:** 

Galvanised steel insert

**Aluminium type:** 

European - Hard Pressed Extruded Structural Aluminium


**Connecting components:** 


European - hot dipped, structural grade corrosive resistant galvanised steel

**Roof covering type:** 

Premium grade, high gloss white, PVC coated polyester fabric - UV resistant and flame retardant according to: DIN 4102 B1, M2; BS 5438/7837; USA NFPA701.



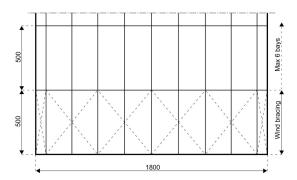

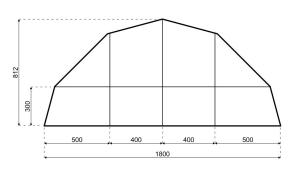


Central America

Greece



## **Accessories**

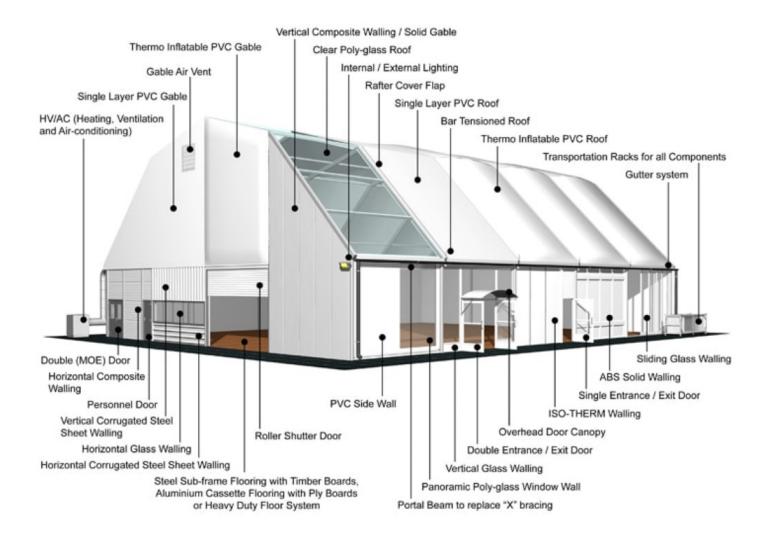

HTS tentiQ disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet on this website. All product, product specification and data are subject to change without notice to improve reliability, function or design or otherwise.

Central America

Greece